

TMA-5XS-7VT

TACTICAL MESH SURFACE MOUNT ANTENNA

PRODUCT OVERVIEW

Mobile Mark's TMA-5XS-7VT Tactical Mesh Antenna (TMA) covers a frequency of 5.4-5.85 GHz. It is for rugged and mobile wireless networking applications.

- **Compact Design:** Small footprint and low profile design makes it an ideal solution for mounting on vehicles or in other space constrained applications.
- **Durable Build:** TMA construction is highly durable and water resistant, ensuring long-lasting performance.

Tested and trusted, Mobile Mark focuses on quality, fast delivery, and leveraging the expertise of highly skilled professionals, specializing in customizable manufacturing solutions across North America and Europe. By combining advanced technologies with comprehensive team knowledge, we ensure tailored products that meet diverse needs, all delivered efficiently to exceed expectations.

To Purchase, visit www.TheAntennaStore.com

Antenna Specifications	
Frequency & Gain	5400 - 5850 MHz, 7 dBi Gain
VSWR	< 2:1 VSWR Over Range
Impedance	50 Ohm Nominal
Vertical Beamwidth	Azimuth: 138° Elevation: 33°
Polarization	Linear-Vertical
Operating Temperature	-40°F (-40°C) to 158°F (70°C)
Radome Material	Impact-Resistant, UV-Stabilized Polycarbonate
Radome Dimensions	5.5" (14cm) H x 4.4" (11.2cm) Dia.
Connector	N Female
Color	Desert Tan



HIGHLIGHTS:


- Rugged Surface Mount
- Omni-Directional
- High Performance, High Gain
- Manufactured in North America & Europe 

RELATED MODELS:

- RM-WB1
- TMA-14-2VT
- TMA-5X-4VT

COMMON APPLICATIONS:

- Rugged Mobile Wireless Networking
- Fixed Site Installation or Mobile
- Settings Requiring Constrained Applications

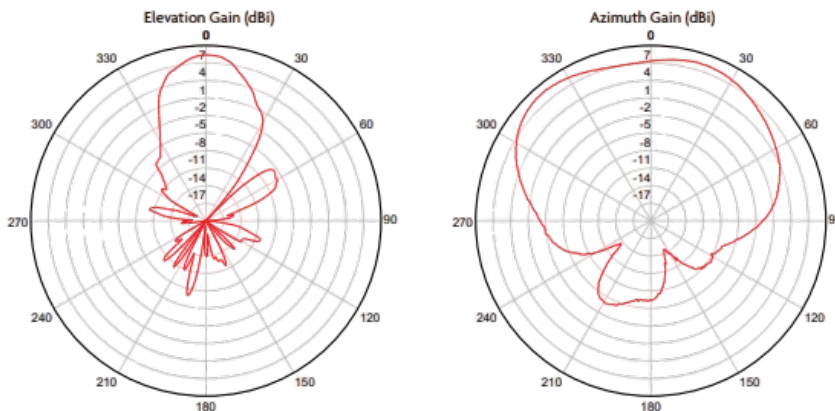

This device is available for use by United States Military or Export only.
 FCC Notice: The use of all radio equipment is subject to regulations in each country. To comply with FCC part 15 rules in the United States, radio equipment must only be used in systems that have been FCC certified. It is the responsibility of the user/professional installer/operator to ensure that only approved equipment/systems are deployed.
 This product is covered by one or more U.S. and foreign patents. Patents: 7,783,270, 7,379,717, 6,606,075, 6,373,448, other patents pending.



US Headquarters +1.847.671.6690 • US/CA Toll Free +1.800.648.2800
 European Facility +44.1543.459555 • www.MobileMark.com

Moving Wireless Forward®